


PIN NO	SYMBOL
1	VSS
2	VDD
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A/Vee
16	K

REV	DESCRIPTION:	DATE
A00	First issue	2010/09/14
A01	铁框左移1mm	2010/09/17
A02	按照客户的要求更改图纸	2010/09/20
A03	左边定位孔到铁框的中心距离53.8mm	2010/09/26

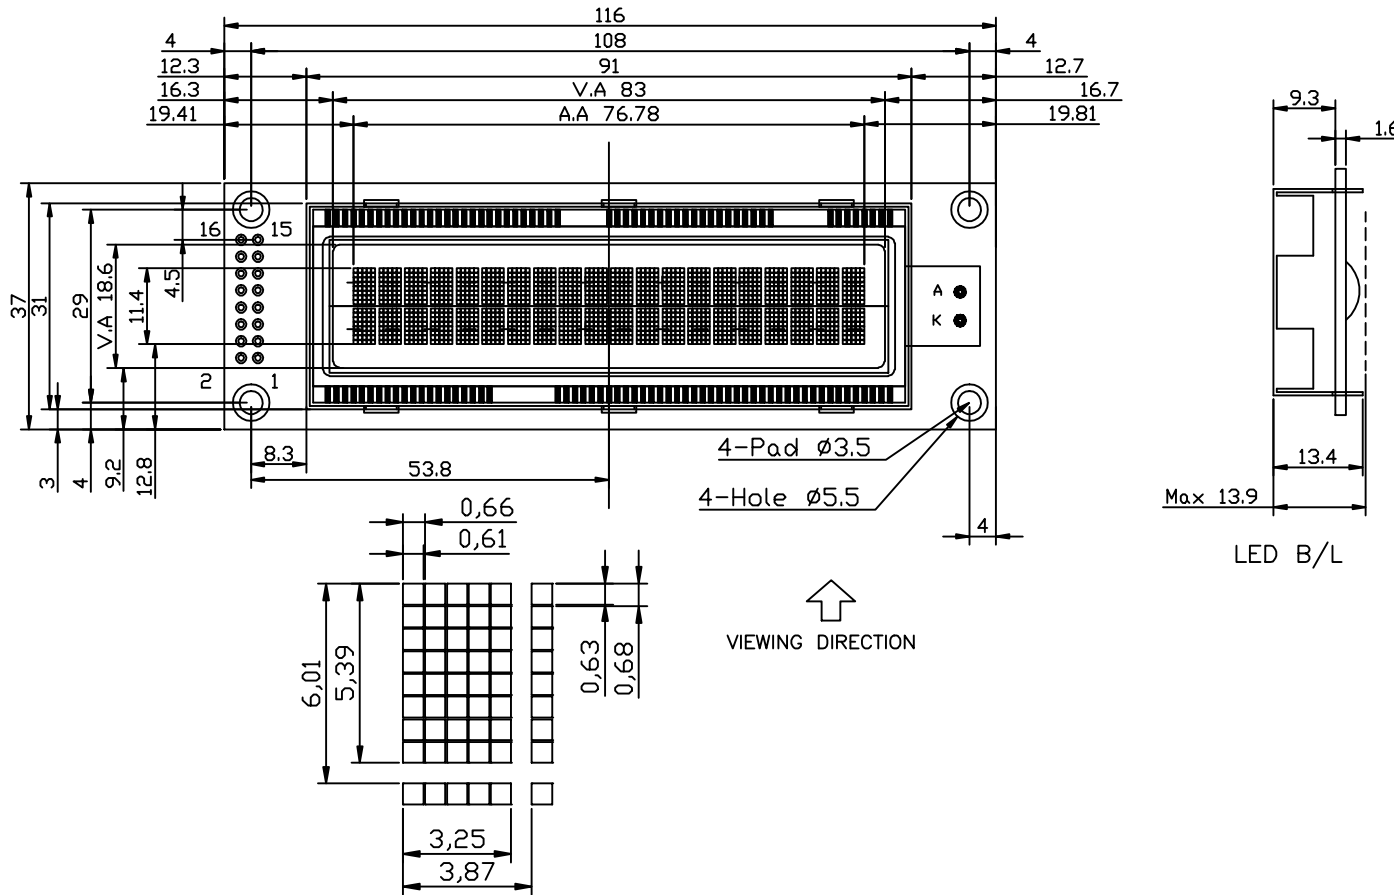

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION: 6 O'CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=4.7V  
 DISPLAY MODE : STN,Y/G,Transflective,Positive,MODE  
 BACKLIGHT: yellow-green color

DESCRIPTION:		<b>C/D</b> 结构图	
SCALE:	1:1	<b>深圳市兴宇合电子有限公司</b>	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	UNIT:	mm
APPROVALS	DATE	MODEL NUMBER:	
APP:		JBC2002A02-00Y-A	
CHK:			
DWN: ZQS	2010/09/26	DO NOT SCALE THIS DRAWING.	PART NO: