
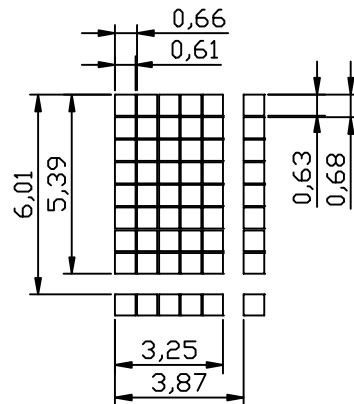
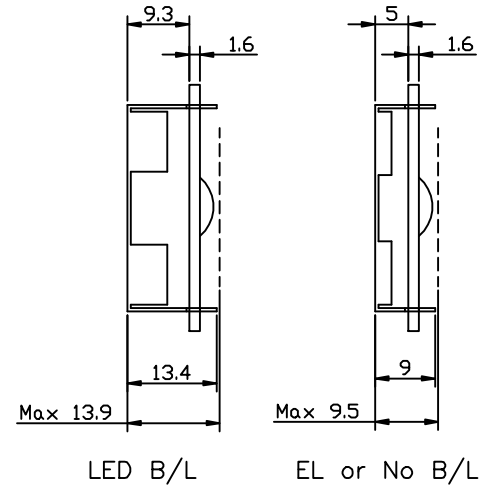


PIN NO	SYMBOL
1	VSS
2	VDD
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A/Vee
16	K

REV	DESCRIPTION:	DATE
A00	First issue	2008/12/26

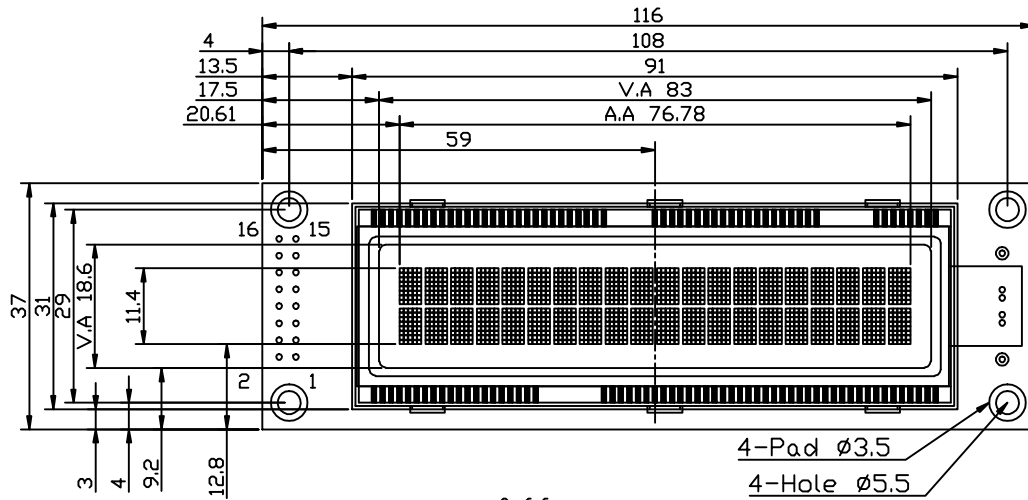

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=4.7V  
 DISPLAY MODE : STN,Y/G,Transflective,Positive,MODE  
 BACKLIGHT: White color or yellow-green color

<b>DESCRIPTION:</b>		<b>C/D 结构图</b>	
<b>SCALE:</b>	1:1	<b>深圳市兴宇合电子有限公司</b>	
<b>SHEET:</b>	1 OF 1		
<b>GENERAL TOL:</b>	± 0.20mm	<b>MODEL NUMBER:</b>	<b>JBC2002A02-00Y-B</b>
<b>APPROVALS</b>		<b>DATE</b>	
<b>APP:</b>		<b>PROJECTION</b>	
<b>CHK:</b>		<b>PART NO:</b>	
<b>DWN:</b> ZY.CHEN	2008/12/26	<b>DO NOT SCALE THIS DRAWING.</b>	