


1		2		3		4		5		6	
PIN NO.	SYMBOL	REV	DESCRIPTION:	DATE							
1	Vss	A00	First issue	20081223							

1	Vss
2	Vdd
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K
17	VEE
18	NC

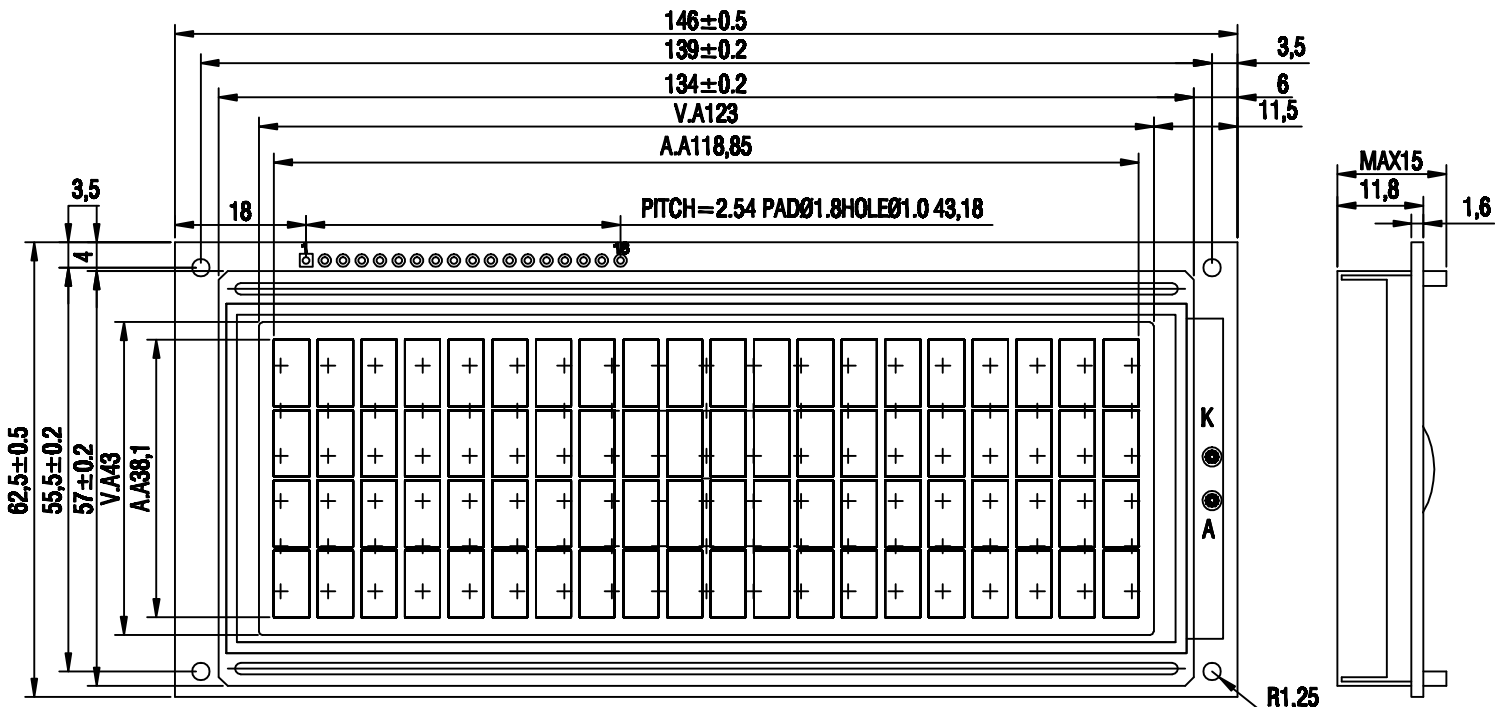

↑
VIEWING DIRECTION

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD= 4.5V
 DISPLAY MODE : STN(Y/G) TRANSFLECTIVE P MODE
 BACK LIGHT ITEM: Y/G(BOTTOM);5.0V I_{max}=570mA
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: ST7066

DESCRIPTION:		C/D 外型图	
SCALE:	1:1	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	UNIT:	mm
APPROVALS:		DATE:	
APP:		MODEL NUMBER:	JBC2004B00-00Y
CHK:		PART NO.:	JBC2004B00-00Y
DWN: DAP	20081223	DO NOT SCALE THIS DRAWING.	PROJECTION

A

A

B

C

D

D

1

2

3

4

4

5

6