


PIN NO	SYMBOL
1	VSS
2	VDD
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A/Vee
16	K

REV	DESCRIPTION:	DATE
A00	First issue	Jan-12-2007

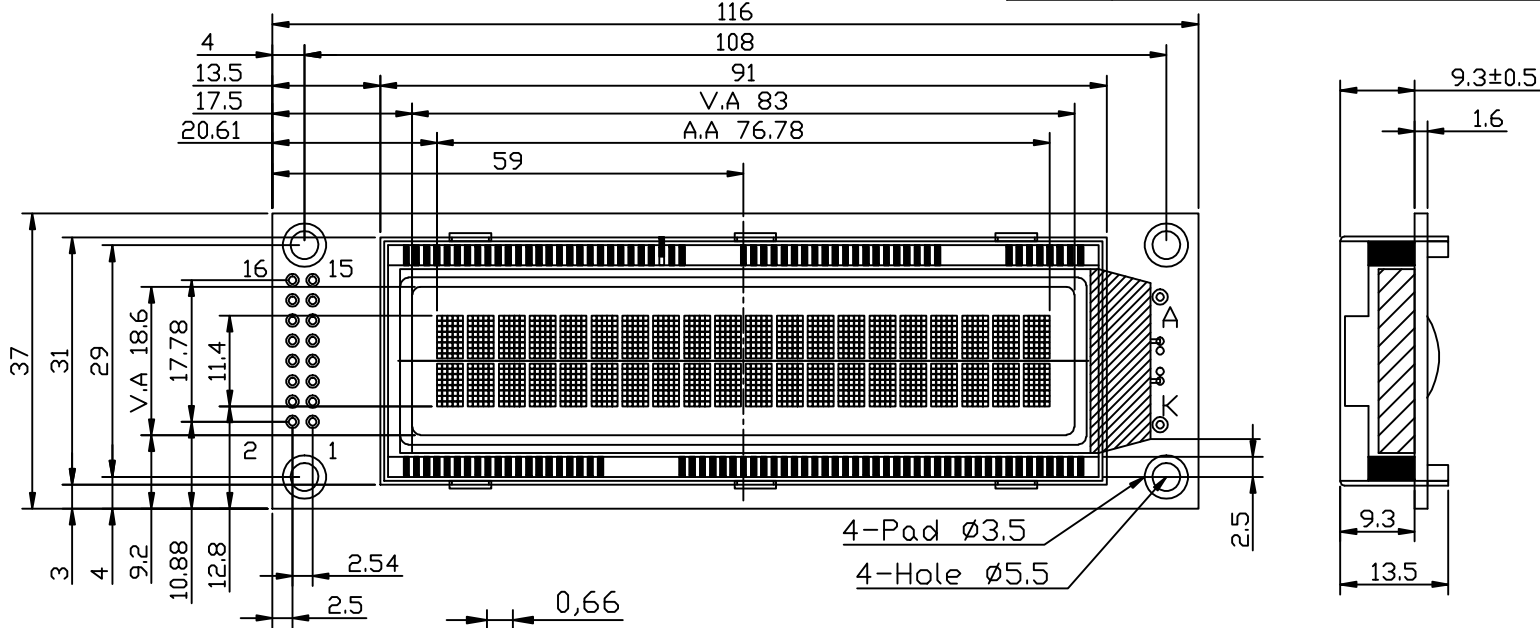

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=4.0V  
 DISPLAY MODE : STN,Y/G,TRANSFLECTIVE,POSITIVE,MODE  
 BACKLIGHT: YELLOE-GREENcolor  
 DRIVER IC: ST7066U

DESCRIPTION:		<b>C/D 结构图</b>	
SCALE:	1:1	<b>深圳市兴宇合电子有限公司</b>	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	UNIT:	mm
APPROVALS:		DATE:	
APP:		MODEL NUMBER:	<b>JBC2002A02-00Y</b>
CHK:			
DWN:	ZQS	2006-04-26	DO NOT SCALE THIS DRAWING.
		PROJECTION	PART NO:

