| PIN NO. | Name |
|---|---|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | RS |
| 5 | RW |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | LED_A |
| 16 | LED_K |

| REV | DESCRIPTION: | DATE |
|---|---|---|
| 00 | First issue | 2010.02.25 |

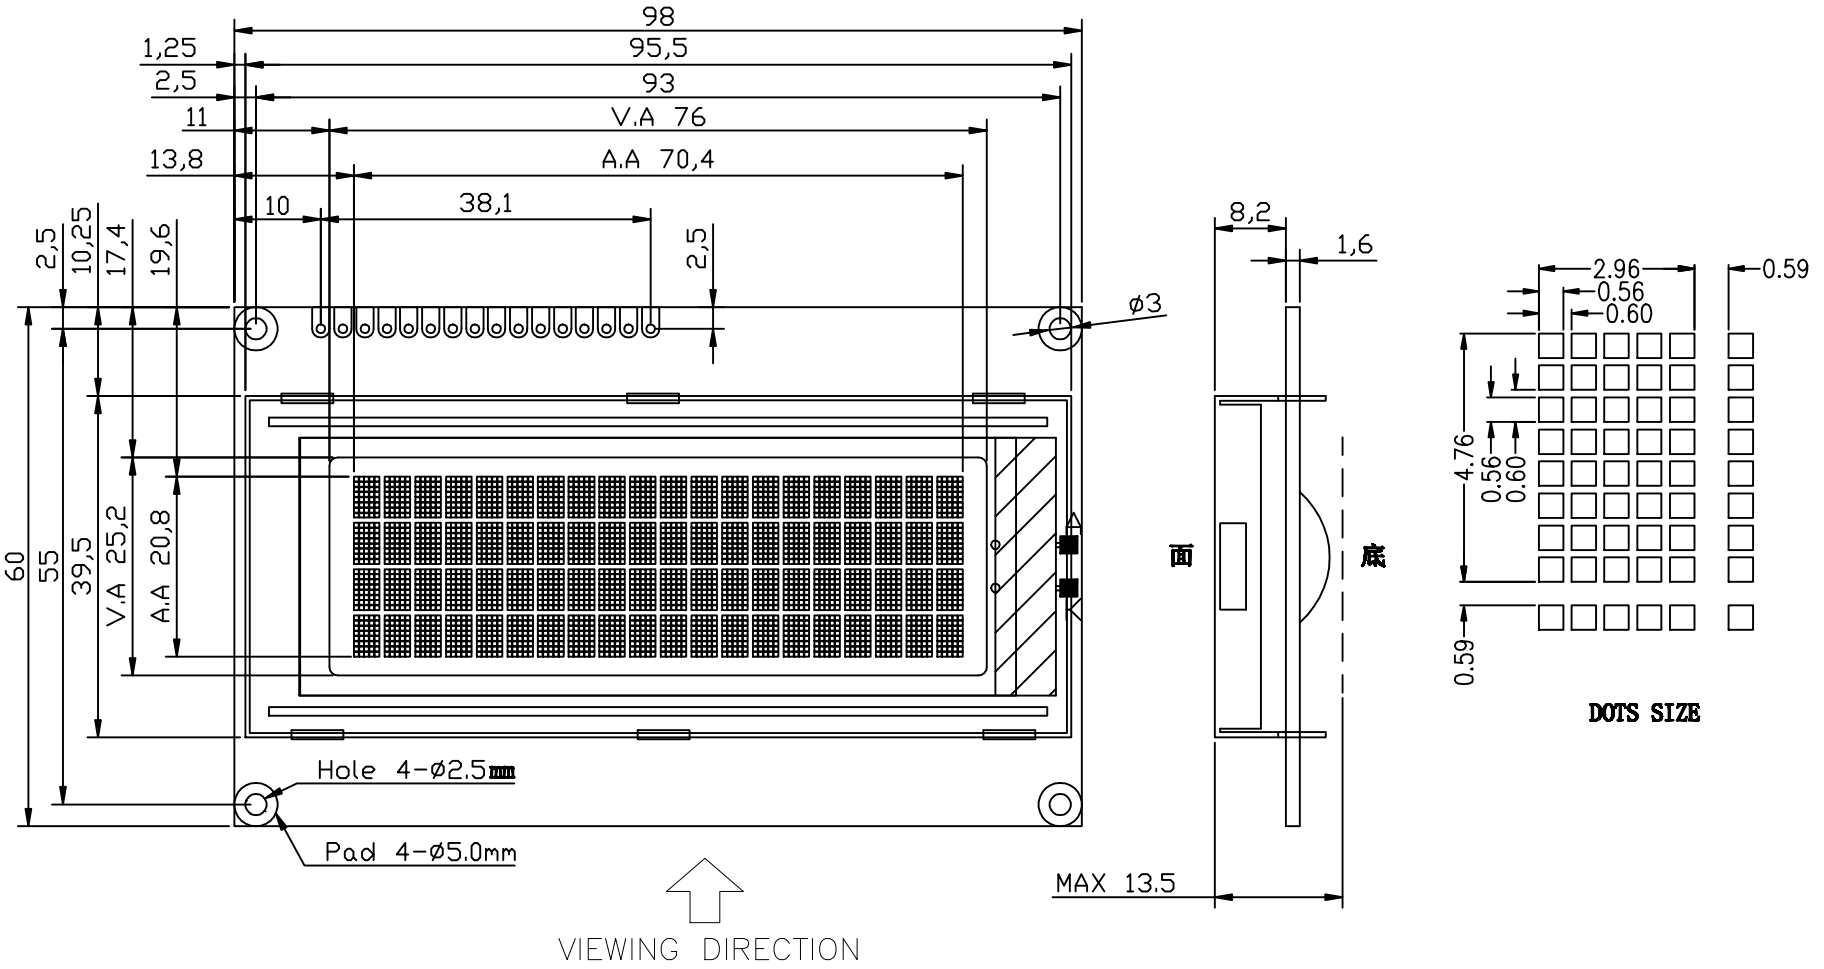


SPECIFICATIONS

STORAGE TEMP : −30°C TO +80°C
OPERATING TEMP : −20°C TO +70°C
VIEWING DIRECTION : 6 O'CLOCK
DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD=4.5V
DISPLAY MODE : STN Y/G TRANSFLECTIVE POSSITIVE MODE
BACKLIGHT: LED BOTTOW − YELLOW GREEN VLED=4.2V

| | | | |
|---|---|---|---|
| DESCRIPTION: | C/D 外型图 | | |
| SCALE: FIT | 深圳市兴宇合电子有限公司 | | |
| SHEET: 1 OF 1 | | | |
| GENERAL TOL: ± 0.20mm | UNIT mm | | |
| APPROVALS | DATE | MODEL NUMBER: JBC2004C00-00Y | PART NO: |
| APP: | | | |
| CHK: | | | |
| DWN: ZQS | 2010.02.25 | DO NOT SCALE THIS DRAWING. | PROJECTION |