




请客户确认回签:

版本
00

更改内容:

更改日期:

编号:

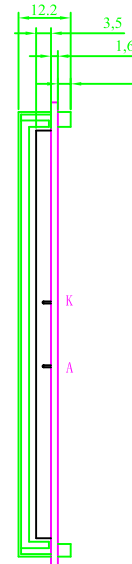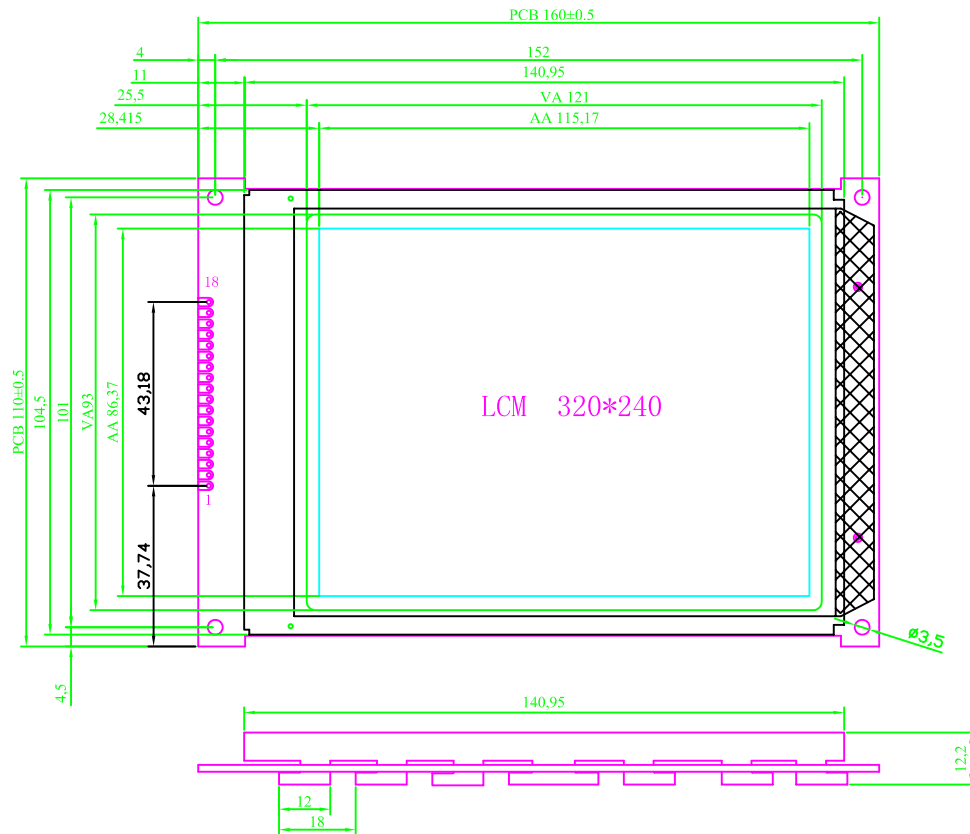

pin no	symboy
1	Vss
2	Vdd
3	Vo
4	WR
5	RD
6	/CS
7	A0
8	/RES
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	LED-A
18	LED-K

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240 DUTY, 1/16 BIAS, VLCD=22.7V, VDD=5.0V
 DISPLAY MODE : STN/BLUE TRANSMISSIVE NEGATIVE MODE
 BackLight: LED White Color ILED<120mA VLED=3.0±0.1
 CONTROLLER/DRIVER IC: RA8835



深圳市兴宇合电子有限公司

SCALE:	FIT
页数:	1 OF 4
允许公差:	mm
比例:	单位: mm
审核:	日期:
初审:	日期:
设计: Lee	日期: 2010.06.11

LCM 结构图

MODEL NUMBER :
JBG320240B00-08W



客户型号:

DO NOT SCALE THIS DRAWING.

PROJECTION