


PIN	NAME
1	VSS
2	VDD
3	VO
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS
16	RES
17	BUSY
18	NC
19	VEE
20	HT1622_CS1
21	HT1622_CS2
22	HT1622_RD
23	HT1622_RW
24	HT1622_DATA

REV	DESCRIPTION:	DATE
A00	First issue	2011/03/18

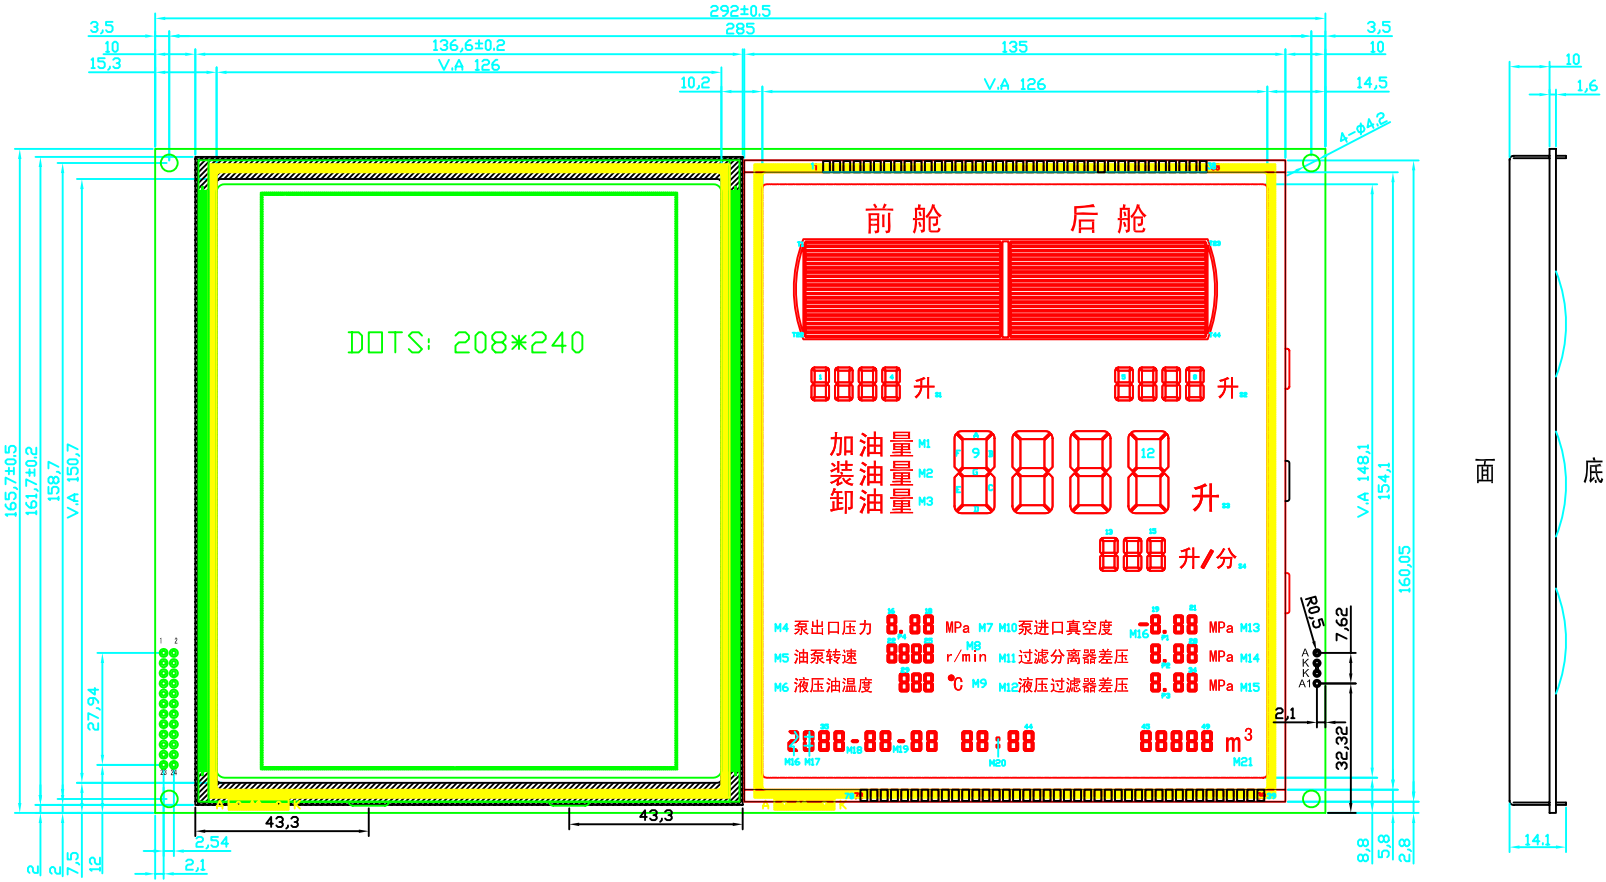

SPECIFICATIONS

STORAGE TEMP : -45°C TO +85°C
 OPERATING TEMP : -30°C TO +80°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240 DUTY, 1/13 BIAS, VDD=5.0V
 DISPLAY MODE : STN Y/G TRANSFLECTIVE POSITIVE MODE
 Controller/Driver: RA8803, and HT1622*2

↑
VIEWING DIRECTION

DESCRIPTION:		C/D 外型图	
SCALE: FIT		深圳市兴宇合电子有限公司	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER : JBG208240A00-00Y	PART NO:
APPROVALS	DATE		
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION
CHK:			
DWN: zqs	2011.03.18		