


PIN NO	SYMBOL(cont)
1	FG/VEE
2	VSS
3	VDD
4	Vo
5	R/W
6	RD
7	CE
8	C/D
9	/RES
10	D0
11	D1
12	D2
13	D3
14	D4
15	D5
16	D6
17	D7
18	FS
19	LED+
20	LED-

REV	DESCRIPTION:	DATE
00	First issue	20081018

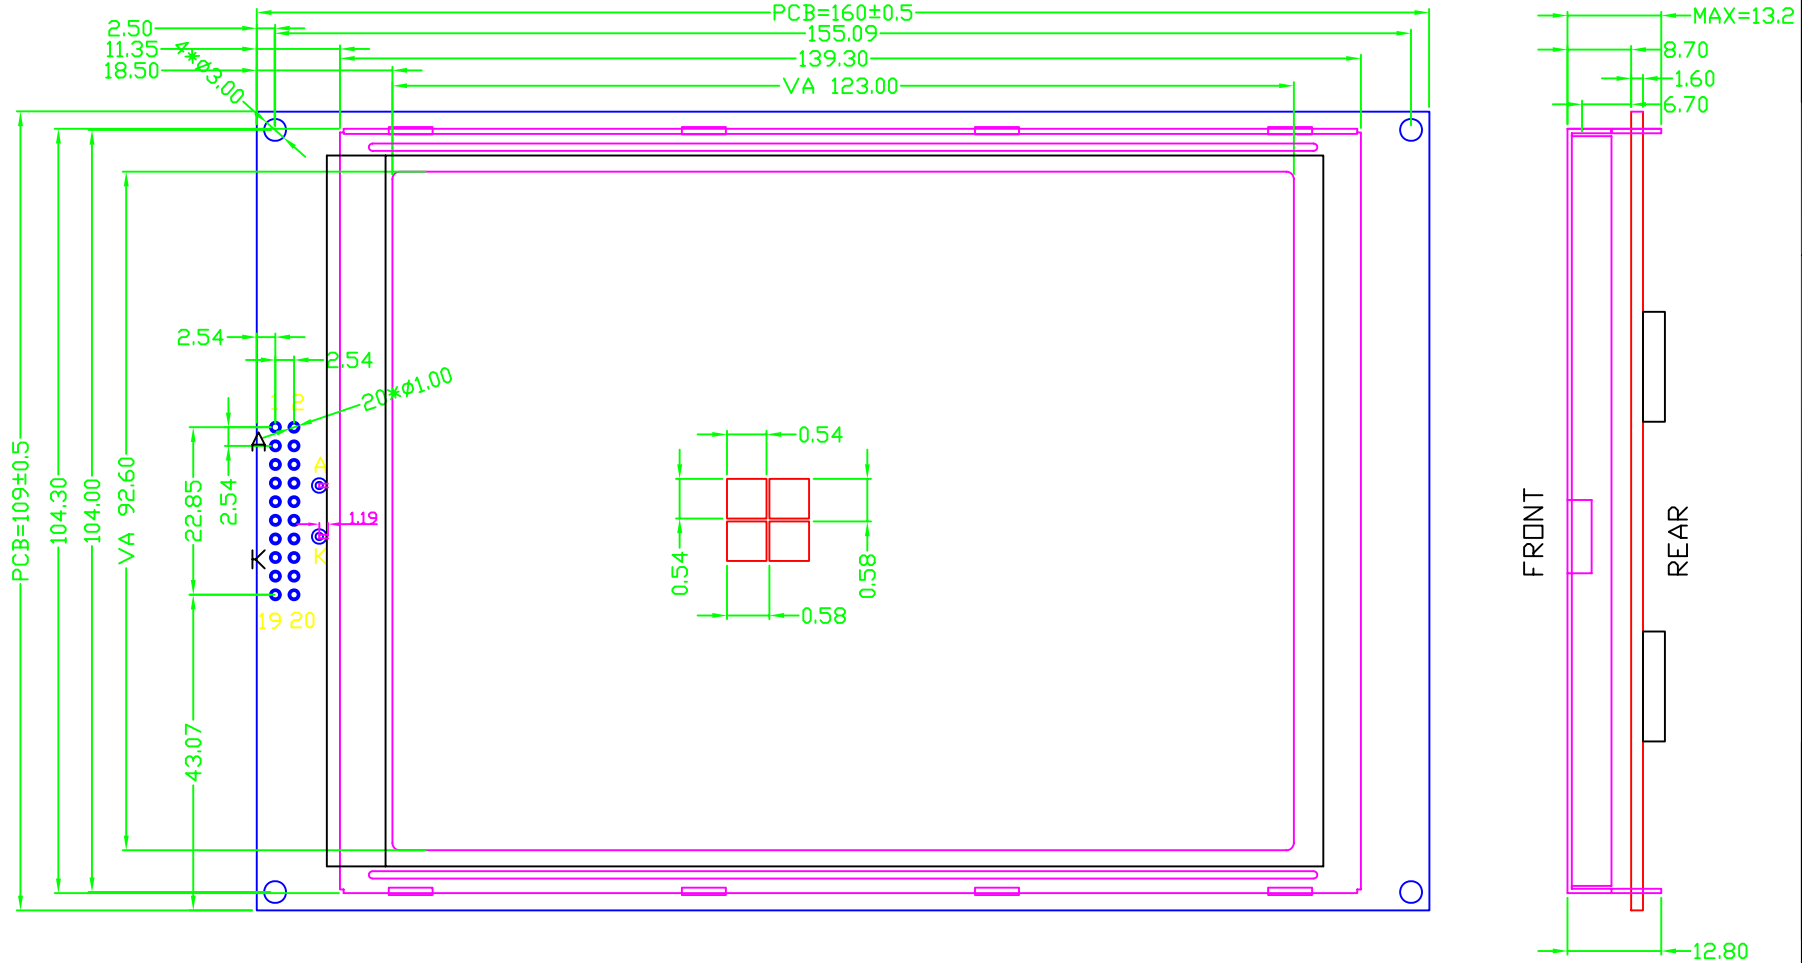

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/128 DUTY, 1/12 BIAS, VLCD=16.0V, VDD=5.0V  
 DISPLAY MODE : FSTN TRANSFLECTIVE POSITIVE MODE  
 BackLight: White Color  
 CONTROLLER/DRIVER IC: T6963

DESCRIPTION:		<b>C/D 结构图</b>	
SCALE: FIT		<b>深圳市兴宇合电子有限公司</b>	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER: <b>JBG160128C02-41W</b>	PART NO:
APPROVALS	DATE		
APP:			
CHK:			
DWN: DAP	20081018	DO NOT SCALE THIS DRAWING.	PROJECTION