


PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	RESET
17	CS2
18	CS3
19	VEE
20	LED_A

REV	DESCRIPTION:	DATE
A00	First issue	2010.02.25

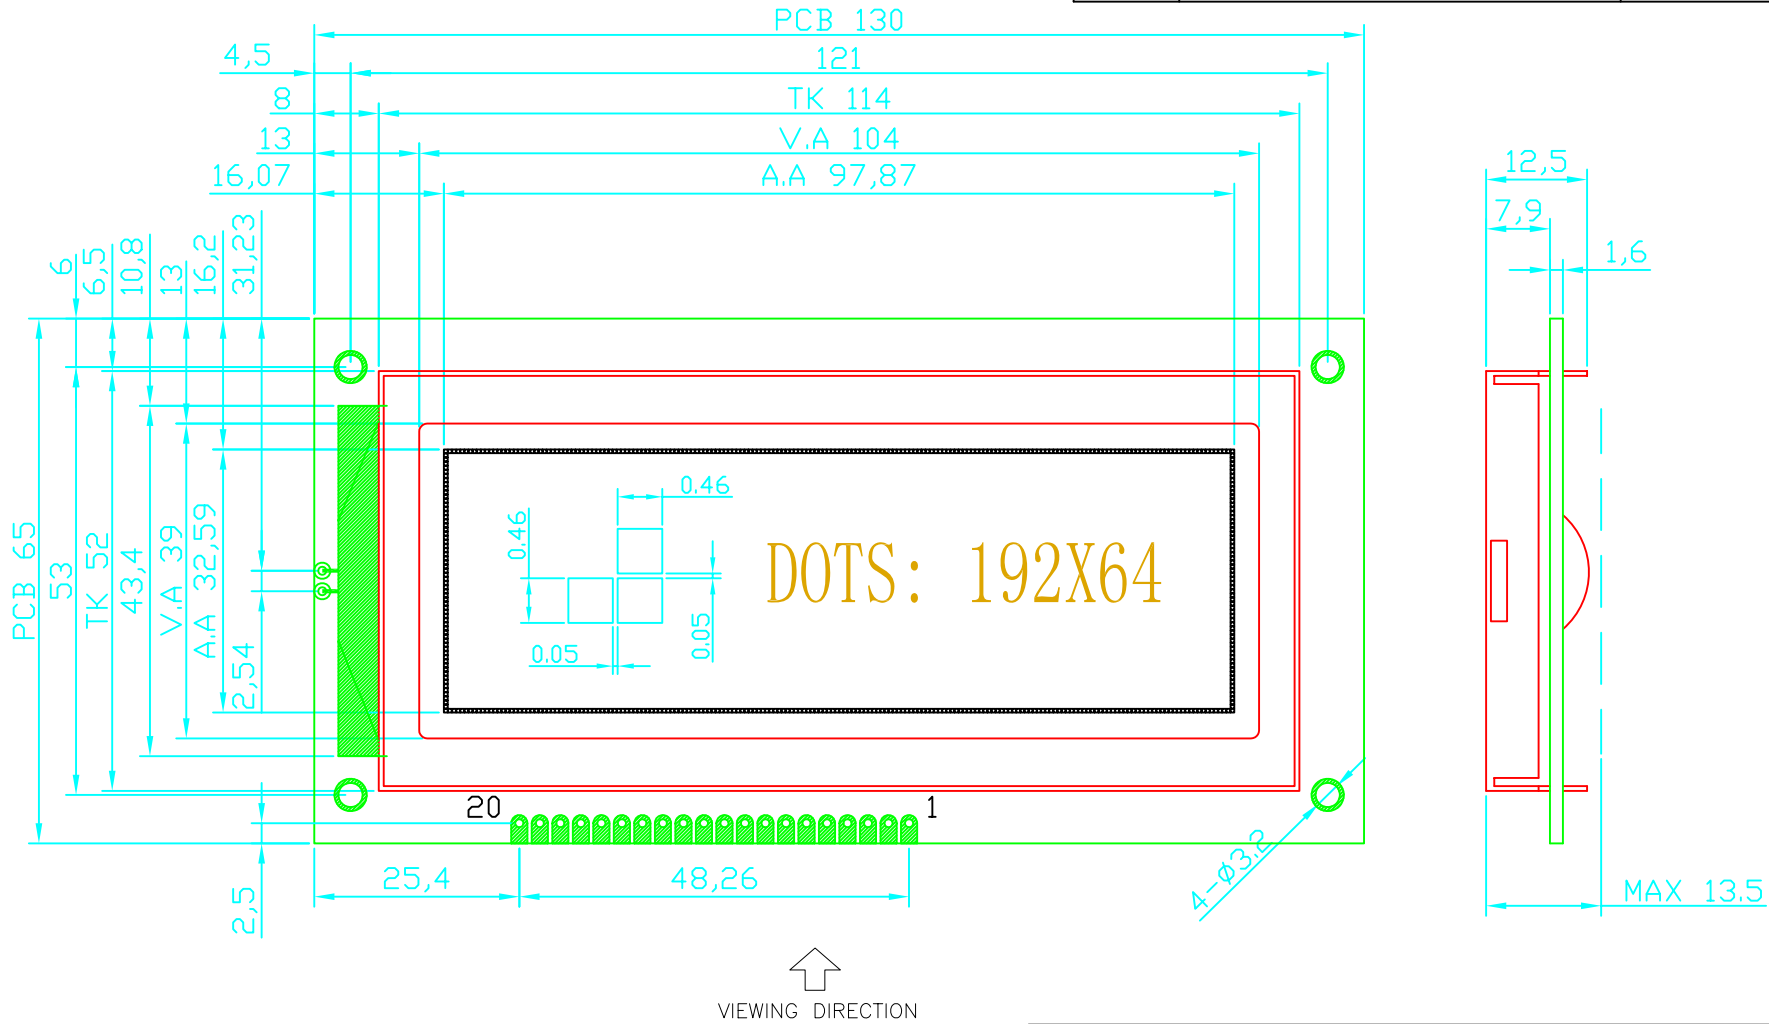

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, VLCD= 9.0V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE MODE
 Back Light: WHITE Color
 DRIVER IC: S6B0107 S6B0108

DESCRIPTION:		C/D 外型图	
SCALE:	FIT	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	UNIT	MODEL NUMBER :	PART NO:
± 0.20mm	mm		
APPROVALS	DATE	JDL19264E00-08W	
APP:			
CHK:		DO NOT SCALE THIS DRAWING.	
DWN: ZQS	2010.02.25	PROJECTION	