


1		2		3		4		5		6	
PIN NO.	SYMBOL							REV	DESCRIPTION:	DATE	
1	V _{SS}							A00	First issue	20101218	

2	V _{DD}
3	CS
4	SID
5	CLK
6	LEDA
7	BUZZ

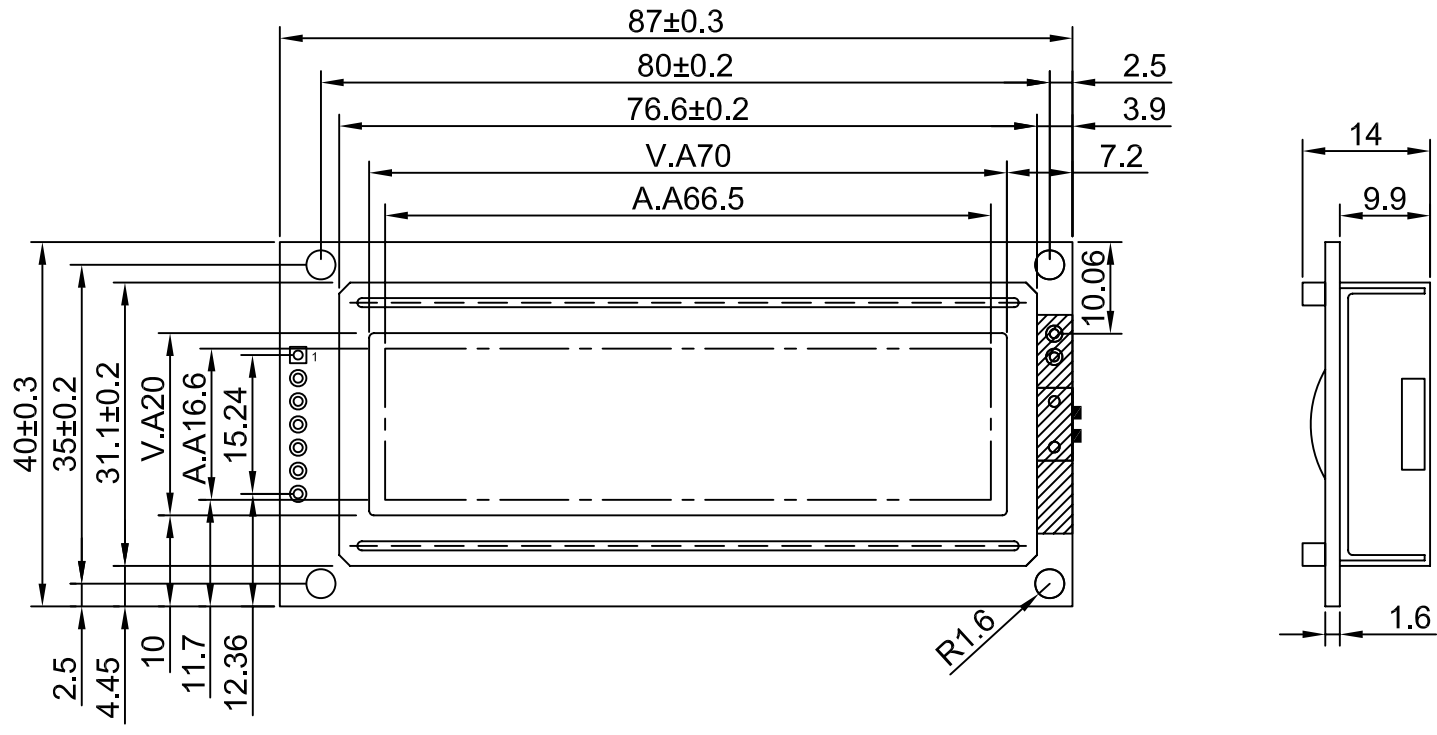

↑
VIEWING DIRECTION

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/6 BIAS, VLCD= 5.0V
 CONTROL IC: ST7920 ST7921
 DISPLAY MODE: STN(BLUE) TRANSMISSIVE N MODE
 BACK LIGHT ITEM: WHITE(SIDE),3.0V
 LCM OPERATING VOLTAGE:5.0V

DESCRIPTION:		C/D 外型图	
SCALE: FIT		深圳市兴宇合电子有限公司	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER : JBG12832E00-08W	PART NO:
APPROVALS	DATE		
APP:			
CHK:			
DWN: PLP	20101218		
DO NOT SCALE THIS DRAWING.		PROJECTION	